

COMP 201

Computer Systems & Programming

Lecture #10 – C Generics – void *



KOÇ
UNIVERSITY

Aykut Erdem // Koç University // Fall 2023

Recap: Heap allocation interface:

```
void *malloc(size_t size);  
void *calloc(size_t nmemb, size_t size);  
void *realloc(void *ptr, size_t size);  
char *strdup(char *s);  
void free(void *ptr);
```

Heap **memory allocation** guarantee:

- `NULL` on failure, so check with `assert`
- Memory is contiguous; it is not recycled unless you call `free`
- `realloc` preserves existing data
- `calloc` zero-initializes bytes, `malloc` and `realloc` do not

Undefined behavior occurs:

- If you overflow (i.e., you access beyond bytes allocated)
- If you use after `free`, or if `free` is called twice on a location.
- If you `realloc/free` non-heap address

Recap: The Stack vs The Heap

Stack ("local variables")

- **Fast**
Fast to allocate/deallocate; okay to oversize
- **Convenient.**
Automatic allocation/ deallocation;
declare/initialize in one step
- **Reasonable type safety**
Thanks to the compiler
- ⚠ **Not especially plentiful**
Total stack size fixed, default 8MB
- ⚠ **Somewhat inflexible**
Cannot add/resize at runtime, scope dictated
by control flow in/out of functions

Heap (dynamic memory)

- **Plentiful.**
Can provide more memory on demand!
- **Very flexible.**
Runtime decisions about how much/when
to allocate, can resize easily with realloc
- **Scope under programmer control**
Can precisely determine lifetime
- ⚠ **Lots of opportunity for error**
Low type safety, forget to allocate/free
before done, allocate wrong size, etc.,
Memory leaks (much less critical)

COMP201 Topic 5: How can we use our knowledge of memory and data representation to write code that works with any data type?

Learning Goals

- Learn how to write C code that works with any data type.
- Learn about how to use `void *` and avoid potential pitfalls.

Plan for Today

- **Overview:** Generics
- Generic Swap
- Generics Pitfalls
- Generic Array Swap

Disclaimer: Slides for this lecture were borrowed from
—Nick Troccoli's Stanford CS107 class

Lecture plan

- **Overview:** Generics
- Generic Swap
- Generics Pitfalls
- Generic Array Swap

Generics

- We always strive to write code that is as general-purpose as possible.
- Generic code reduces code duplication and means you can make improvements and fix bugs in one place rather than many.
- Generics is used throughout C for functions to sort any array, search any array, free arbitrary memory, and more.
- How can we write generic code in C?

Lecture Plan

- **Overview:** Generics
- Generic Swap
- Generics Pitfalls
- Generic Array Swap

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {
    int temp = *a;
    *a = *b;
    *b = temp;
}

int main(int argc, char *argv[]) {
    int x = 2;
    int y = 5;
    swap_int(&x, &y);
    // want x = 5, y = 2
    printf("x = %d, y = %d\n", x, y);
    return 0;
}
```

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()



		Stack
Address		Value
		...
x	0xff14	2
y	0xff10	5
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

swap_int()

		Stack
Address		Value
		...
x	0xff14	2
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff14
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()
swap_int()

		Stack
Address		Value
		...
x	0xff14	2
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff14
temp	0xf0c	2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {
    int temp = *a;
    *a = *b;
    *b = temp;
}

int main(int argc, char *argv[]) {
    int x = 2;
    int y = 5;
    swap_int(&x, &y);
    // want x = 5, y = 2
    printf("x = %d, y = %d\n", x, y);
    return 0;
}
```

main()
swap_int()


		Stack
Address		Value
		...
x	0xff14	5
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff14
temp	0xf0c	2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {
    int temp = *a;
    *a = *b;
    *b = temp;
}

int main(int argc, char *argv[]) {
    int x = 2;
    int y = 5;
    swap_int(&x, &y);
    // want x = 5, y = 2
    printf("x = %d, y = %d\n", x, y);
    return 0;
}
```

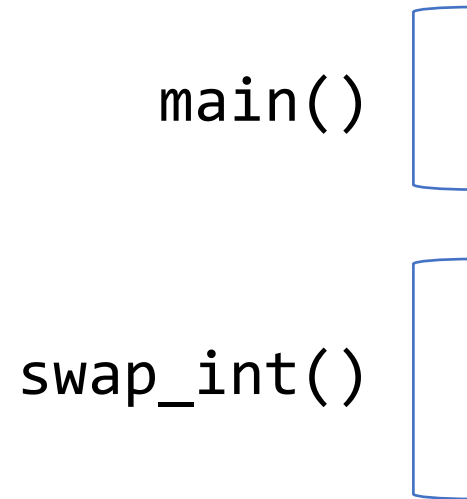

		Stack
Address		Value
		...
x	0xff14	5
y	0xff10	2
		...
b	0xf18	0xff10
a	0xf10	0xff14
temp	0xf0c	2
		...

The table shows the state of memory. The `main()` frame contains variables `x` (value 5) and `y` (value 2). The `swap_int()` frame contains variables `b` (value 0xff10), `a` (value 0xff14), and `temp` (value 2). Red arrows indicate the flow of data: one arrow points from the value 5 in the `x` memory location to the `a` argument of `swap_int()`, and another arrow points from the value 2 in the `y` memory location to the `b` argument of `swap_int()`.

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()



		Stack
Address		Value
		...
x	0xff14	5
y	0xff10	2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()



		Stack
Address		Value
		...
x	0xff14	5
y	0xff10	2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()



		Stack
Address		Value
		...
x	0xff14	5
y	0xff10	2
		...

“Oh, when I said ‘numbers’ I
meant shorts, not ints.”



Swap

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    short x = 2;  
    short y = 5;  
    swap_short(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

Swap

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    short x = 2;  
    short y = 5;  
    swap_short(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

swap_short()

		Stack
Address		Value
		...
x	0xff12	2
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff12
temp	0xf0e	2
		...

“You know what, I goofed.
We’re going to use strings.
Could you write something to
swap those?”



Swap


```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

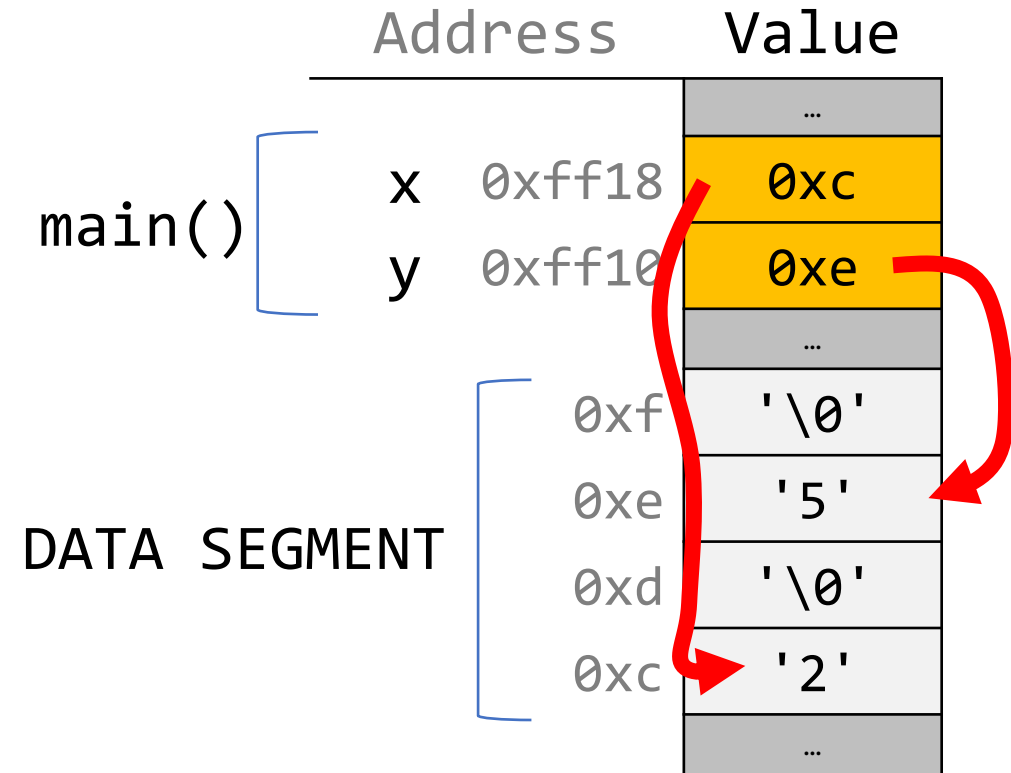

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) { swap_string()  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

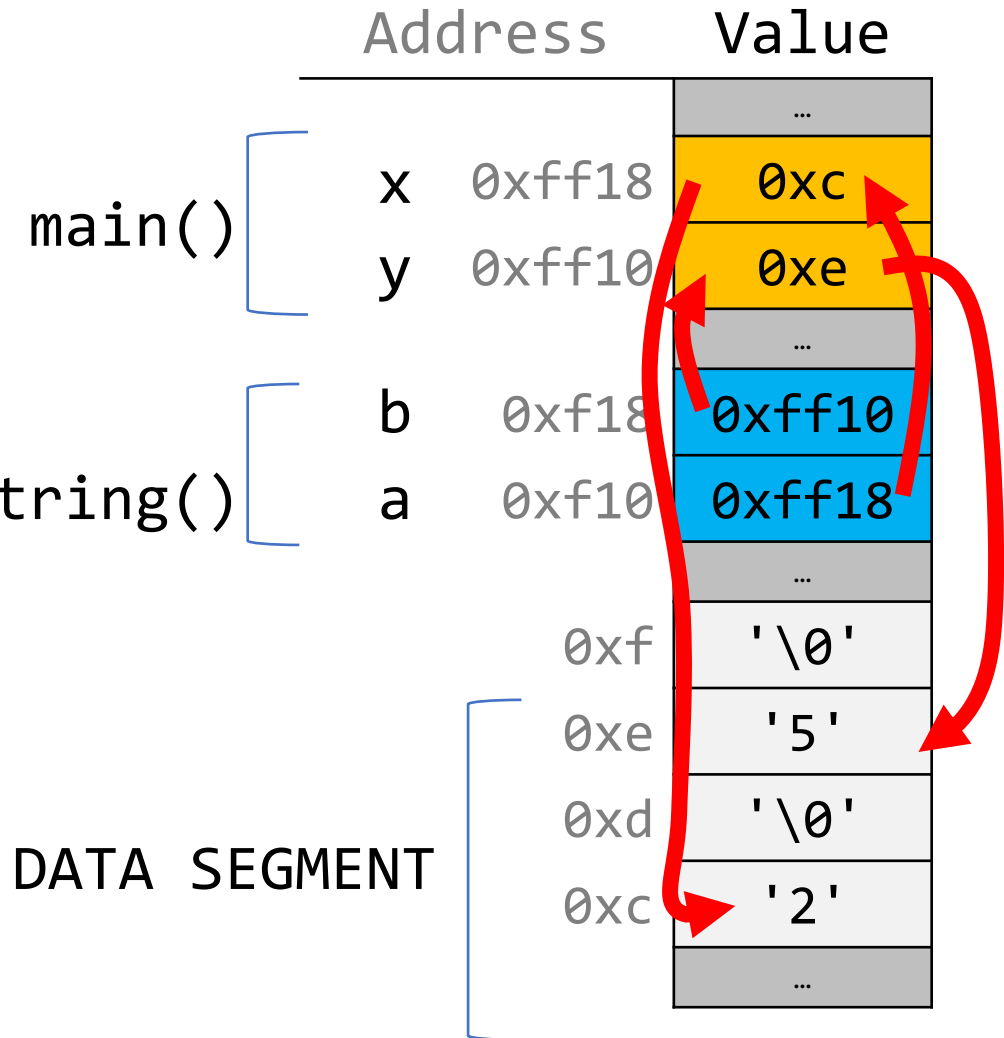

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) { swap_string()  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

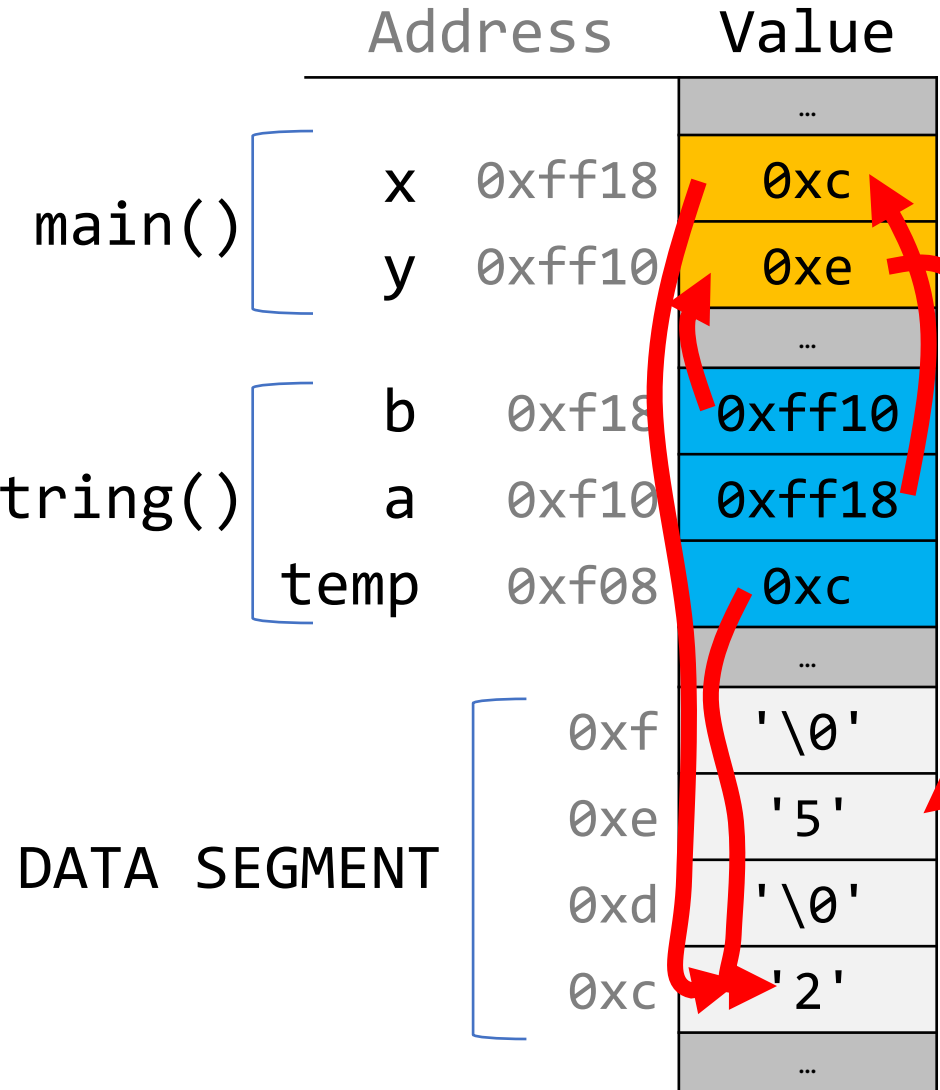

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

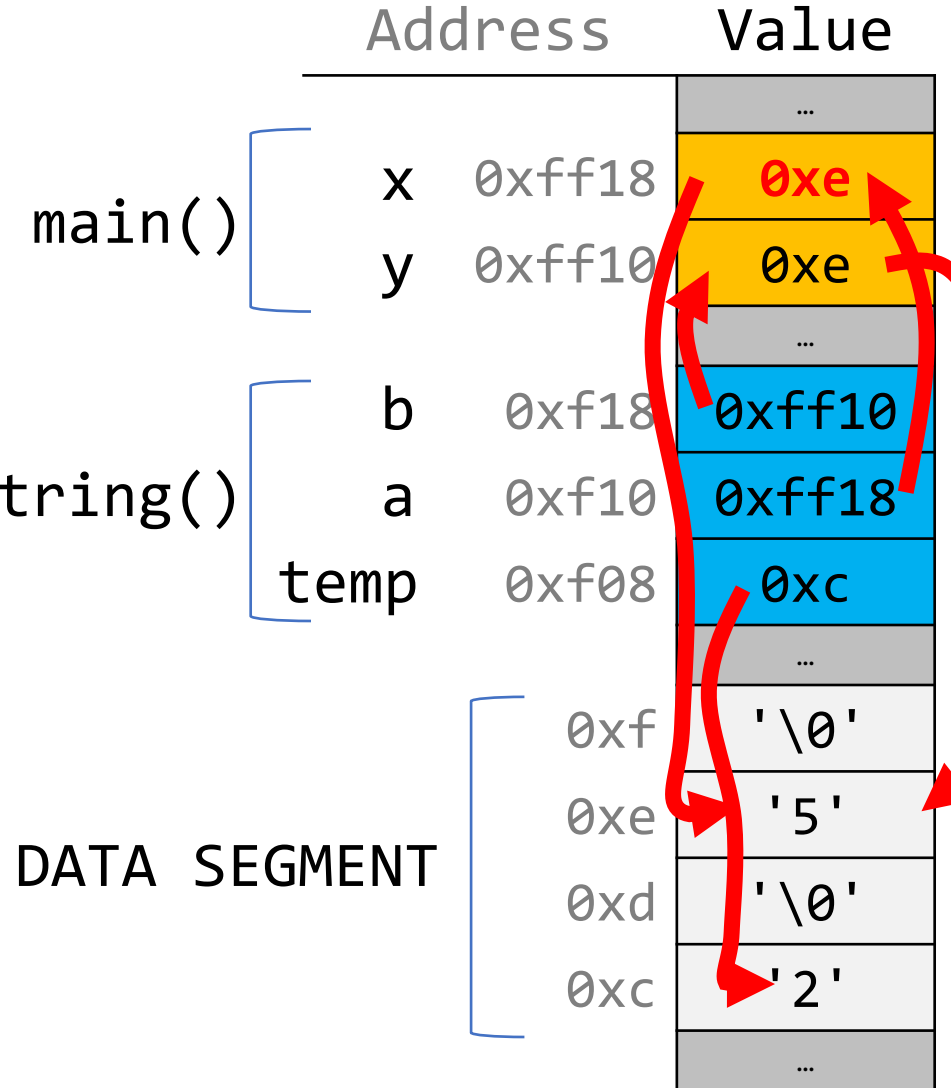

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

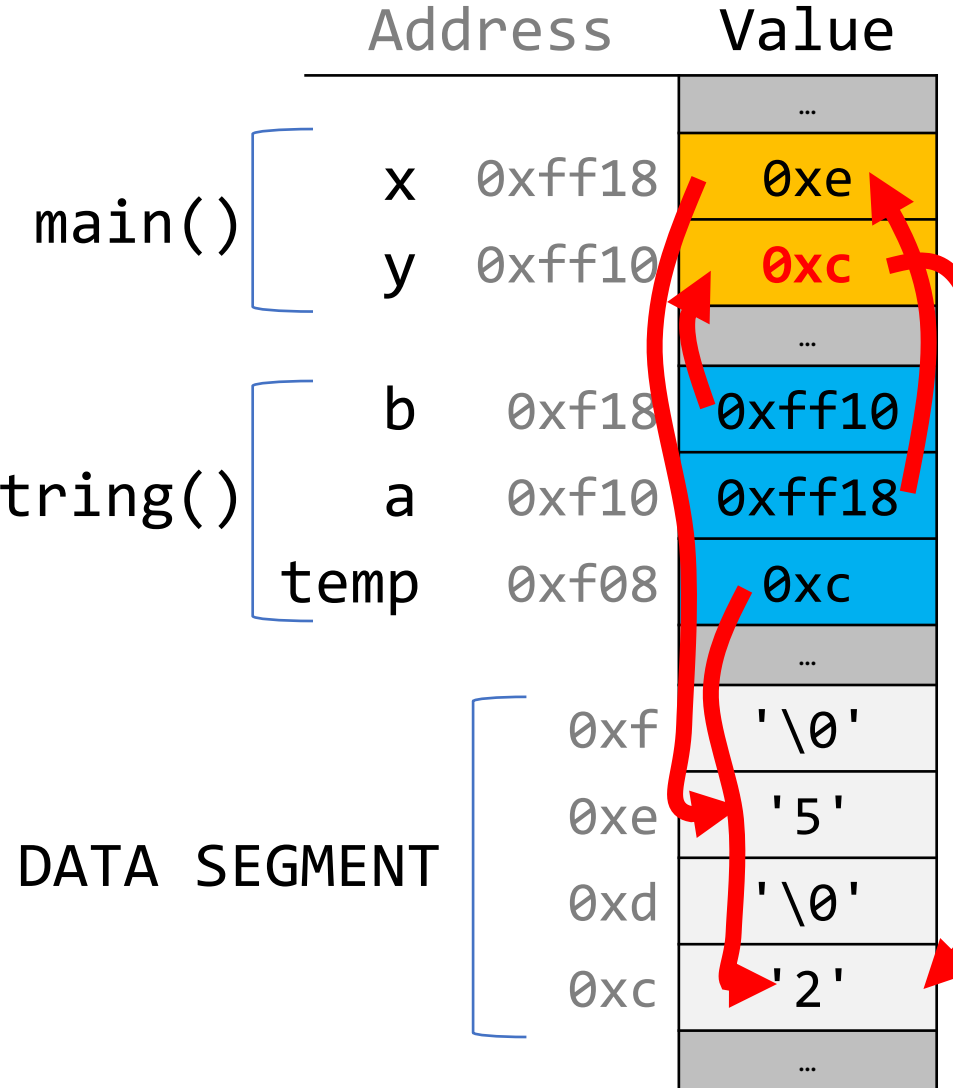

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

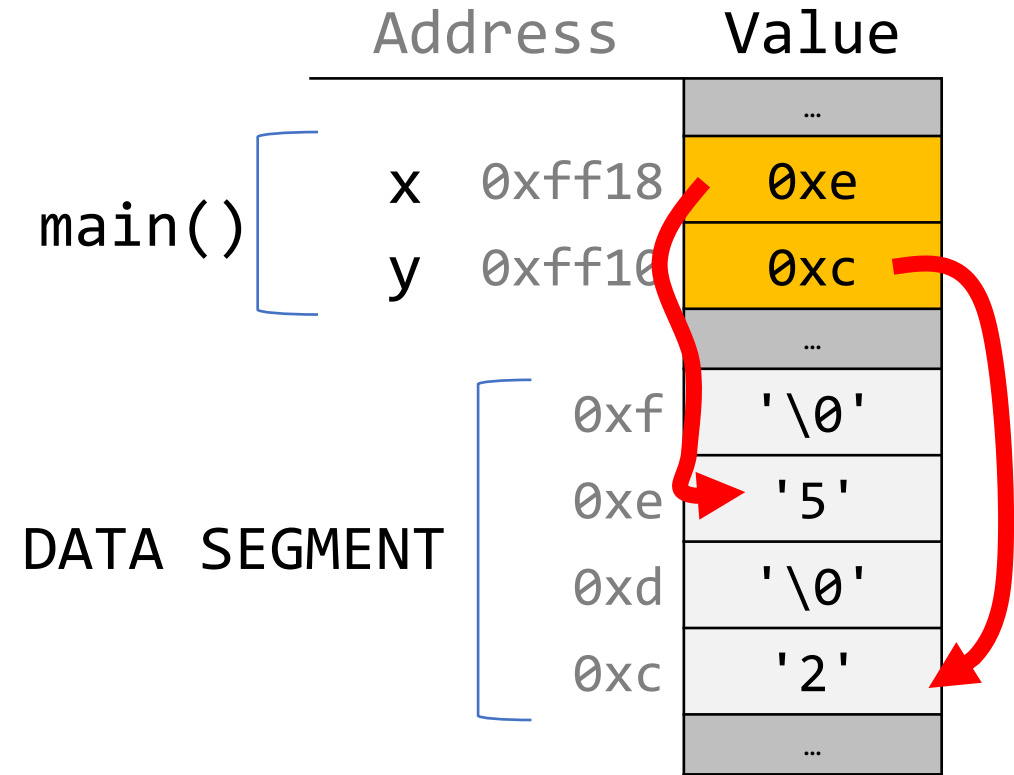

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

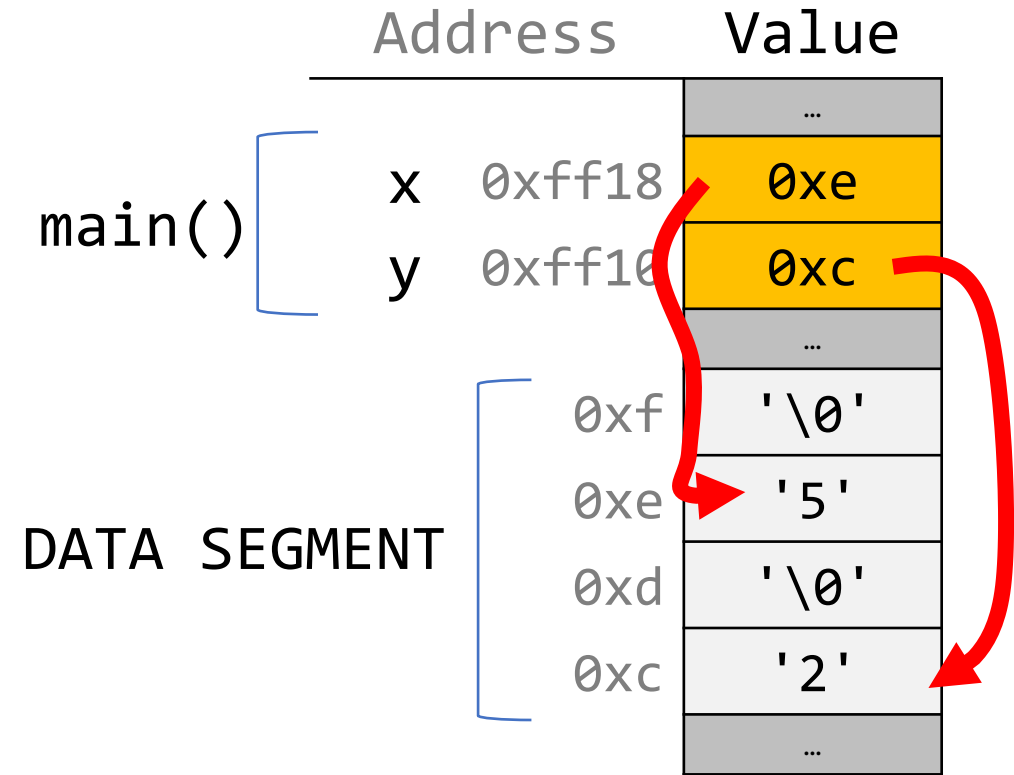

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

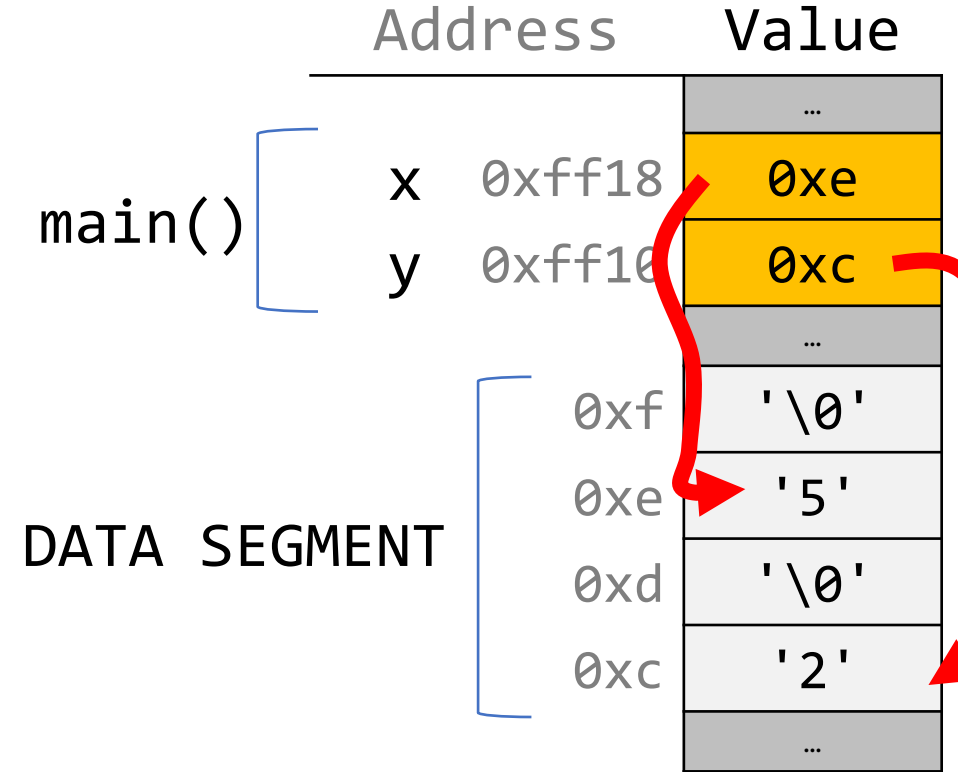

“Awesome! Thanks.”

“Awesome! Thanks. We also have 20 custom struct types. Could you write swap for those too?”



“Awesome! Thanks. We also have 20 custom struct types. Could you write swap for those too?”



A user-defined structured data type in C (will be covered next week)

Generic Swap

What if we could write *one* function to swap two values of any single type?

```
void swap_int(int *a, int *b) { ... }
```

```
void swap_float(float *a, float *b) { ... }
```

```
void swap_size_t(size_t *a, size_t *b) { ... }
```

```
void swap_double(double *a, double *b) { ... }
```

```
void swap_string(char **a, char **b) { ... }
```

```
void swap_mystruct(mystruct *a, mystruct *b) { ... }
```

...

Generic Swap

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

Generic Swap

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

All 3:

- Take pointers to values to swap
- Create temporary storage to store one of the values
- Move data at **b** into where **a** points
- Move data in temporary storage into where **b** points

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

```
int temp = *data1ptr;
```

4 bytes

```
short temp = *data1ptr;
```

2 bytes

```
char *temp = *data1ptr;
```

8 bytes

Problem: each type may need a different size temp!

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

```
*data1Ptr = *data2ptr;
```

4 bytes

```
*data1Ptr = *data2ptr;
```

2 bytes

```
*data1Ptr = *data2ptr;
```

8 bytes

Problem: each type needs to copy a different amount of data!

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

`*data2ptr = temp;`

4 bytes

`*data2ptr = temp;`

2 bytes

`*data2ptr = temp;`

8 bytes

Problem: each type needs to copy a different amount of data!

C knows the size of temp, and knows how many bytes to copy, because of the variable types.

Is there a way to make a
version that doesn't care about
the variable types?

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

If we don't know the data type, we don't know how many bytes it is. Let's take that as another parameter.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

If we don't know the data type, we don't know how many bytes it is. Let's take that as another parameter.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Let's start by making space to store the temporary value. How can we make **nbytes** of temp space?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    void temp; ???  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Let's start by making space to store the temporary value. How can we make **nbytes** of temp space?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

temp is **nbytes** of memory,
since each **char** is 1 byte!

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Now, how can we copy in what **data1ptr** points to into **temp**?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Now, how can we copy in what **data1ptr** points to into **temp**?

Generic Swap


```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

We can't dereference a **void *** (or set an array equal to something). C doesn't know what it points to! Therefore, it doesn't know how many bytes there it should be looking at.

memcpy

memcpy is a function that copies a specified amount of bytes at one address to another address.

```
void *memcpy(void *dest, const void *src, size_t n);
```



`const` is a type qualifier which indicates that the data is read only (will be covered next week)

memcpy

memcpy is a function that copies a specified amount of bytes at one address to another address.

```
void *memcpy(void *dest, const void *src, size_t n);
```

It copies the next *n* bytes that *src* points to to the location contained in *dest*. (It also returns **dest**). It does not support regions of memory that overlap.

memcpy must take **pointers** to the bytes to work with to know where they live and where they should be copied to.

```
int x = 5;  
int y = 4;  
memcpy(&x, &y, sizeof(x)); // like x = y
```

memmove



memmove is the same as `memcpy`, but supports overlapping regions of memory. (Unlike its name implies, it still “copies”).

```
void *memmove(void *dest, const void *src, size_t n);
```

It copies the next `n` bytes that `src` points to to the location contained in `dest`. (It also returns **dest**).

memmove

When might memmove be useful?

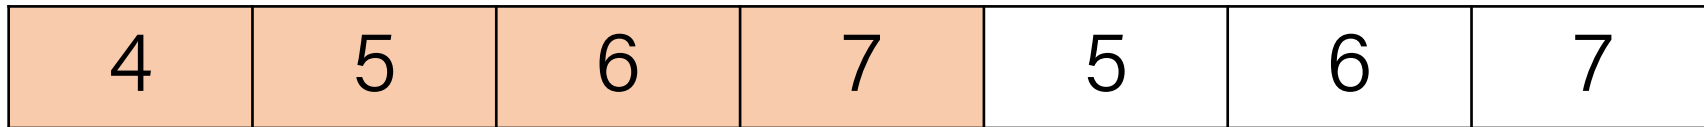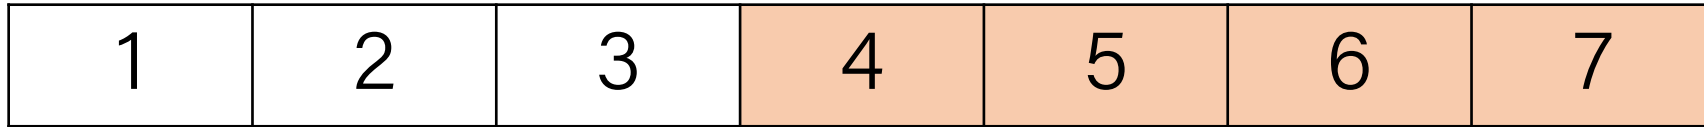

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

We can't dereference a **void ***. C doesn't know what it points to! Therefore, it doesn't know how many bytes there it should be looking at.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

How can **memcpy** or **memmove** help us here?

```
void *memcpy(void *dest, const void *src, size_t n);
```

```
void *memmove(void *dest, const void *src, size_t n);
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

We can copy the bytes ourselves into temp! This is equivalent to **temp = *data1ptr** in non-generic versions, but this works for *any* type of *any* size.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

How can we copy data2 to the location of data1?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    *data1ptr = *data2ptr; ???  
    // copy data in temporary storage to location of data2  
}
```

How can we copy data2 to the location of data1?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
}
```

How can we copy data2 to the location of data1?
memcpy!

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
}
```

How can we copy temp's data to the location of data2?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

How can we copy temp's data to the location of data2? **memcpy!**

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
int x = 2;  
int y = 5;  
swap(&x, &y, sizeof(x));
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
short x = 2;  
short y = 5;  
swap(&x, &y, sizeof(x));
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
char *x = "2";  
char *y = "5";  
swap(&x, &y, sizeof(x));
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
mystruct x = {...};  
mystruct y = {...};  
swap(&x, &y, sizeof(x));
```


C Generics

- We can use **void *** and **memcpy** to handle memory as generic bytes.
- If we are given where the data of importance is, and how big it is, we can handle it!

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes)
{
    char temp[nbytes];
    memcpy(temp, data1ptr, nbytes);
    memcpy(data1ptr, data2ptr, nbytes);
    memcpy(data2ptr, temp, nbytes);
}
```

Lecture Plan

- **Overview: Generics**
- Generic Swap
- **Generics Pitfalls**
- Generic Array Swap

void * Pitfalls

- `void *`s are powerful, but dangerous - C cannot do as much checking!
- E.g. with `int`, C would never let you swap *half* of an `int`. With `void *`s, this can happen! (*How? Let's find out!*)

Demo: void *s Gone Wrong



swap.c

void * Pitfalls

- `void *` has more room for error because it manipulates arbitrary bytes without knowing what they represent. This can result in some strange memory Frankensteins!



<http://i.ytimg.com/vi/10gPoYjq3EA/hqdefault.jpg>

Lecture Plan

- **Overview:** Generics
- Generic Swap
- Generics Pitfalls
- Generic Array Swap

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers.

```
void swap_ends_int(int *arr, size_t nelems) {  
    int tmp = arr[0];  
    arr[0] = arr[nelems - 1];  
    arr[nelems - 1] = tmp;  
}
```

Wait – we just wrote a generic swap function. Let's use that!

```
int main(int argc, char *argv[]) {  
    int nums[] = {5, 2, 3, 4, 1};  
    size_t nelems = sizeof(nums) / sizeof(nums[0]);  
    swap_ends_int(nums, nelems);  
    // want nums[0] = 1, nums[4] = 5  
    printf("nums[0] = %d, nums[4] = %d\n", nums[0], nums[4]);  
    return 0;  
}
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers.

```
void swap_ends_int(int *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

Wait – we just wrote a generic swap function. Let's use that!

```
int main(int argc, char *argv[]) {  
    int nums[] = {5, 2, 3, 4, 1};  
    size_t nelems = sizeof(nums) / sizeof(nums[0]);  
    swap_ends_int(nums, nelems);  
    // want nums[0] = 1, nums[4] = 5  
    printf("nums[0] = %d, nums[4] = %d\n", nums[0], nums[4]);  
    return 0;  
}
```


Swap Ends

Let's write out what some other versions would look like (just in case).

```
void swap_ends_int(int *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

```
void swap_ends_short(short *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

```
void swap_ends_string(char **arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

```
void swap_ends_float(float *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

The code seems to be the same regardless of the type!

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

Is this generic? Does this work?

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

Is this generic? Does this work?

Unfortunately, not! First, we no longer know the element size. Second, **pointer arithmetic depends on the type of data being pointed to. With a `void *`, we lose that information!**

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

We need to know the element size, so let's add a parameter.

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + nelems - 1, elem_bytes);  
}
```

We need to know the element size, so let's add a parameter.

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

`int?`

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

int: adds 3 places to `arr`, and `3 * sizeof(int) = 12 bytes`

Pointer Arithmetic

```
arr + nelems - 1
```

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

int: adds 3 places to `arr`, and `3 * sizeof(int) = 12 bytes`

short?

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

int: adds 3 places to `arr`, and `3 * sizeof(int) = 12` bytes

short: adds 3 places to `arr`, and `3 * sizeof(short) = 6` bytes

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

int: adds 3 places to `arr`, and `3 * sizeof(int) = 12` bytes

short: adds 3 places to `arr`, and `3 * sizeof(short) = 6` bytes

char *: adds 3 places to `arr`, and `3 * sizeof(char *) = 24` bytes

In each case, we need to know the element size to do the arithmetic.

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + nelems - 1, elem_bytes);  
}
```

How many bytes past `arr` should we go to get to the last element?

`(nelems - 1) * elem_bytes`

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

How many bytes past `arr` should we go to get to the last element?

`(nelems - 1) * elem_bytes`

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

But C still can't do arithmetic with a `void*`. We need to tell it to not worry about it, and just add bytes. **How can we do this?**

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

But C still can't do arithmetic with a `void*`. We need to tell it to not worry about it, and just add bytes. **How can we do this?**

`char *` pointers already add bytes!

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
int nums[] = {5, 2, 3, 4, 1};  
size_t nelems = sizeof(nums) / sizeof(nums[0]);  
swap_ends(nums, nelems, sizeof(nums[0]));
```


Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
short nums[] = {5, 2, 3, 4, 1};  
size_t nelems = sizeof(nums) / sizeof(nums[0]);  
swap_ends(nums, nelems, sizeof(nums[0]));
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
char *strs[] = {"Hi", "Hello", "Howdy"};  
size_t nelems = sizeof(strs) / sizeof(strs[0]);  
swap_ends(strs, nelems, sizeof(strs[0]));
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
mystruct structs[] = ...;  
size_t nelems = ...;  
swap_ends(structs, nelems, sizeof(structs[0]));
```

Demo: Void *s Gone Wrong



swap_ends.c

Void * Pitfalls

- **void** *s are powerful, but dangerous - C cannot do as much checking!
- E.g. with **int**, C would never let you swap *half* of an **int**. With **void** *s, this can happen!

```
int x = 0xffffffff;
int y = 0xeeeeeeeee;
swap(&x, &y, sizeof(short));

// now x = 0xffffeeee, y = 0xeeeeffff!
printf("x = 0x%x, y = 0x%x\n", x, y);
```

Recap

- **void *** is a variable type that represents a generic pointer “to something”.
- We cannot perform pointer arithmetic with or dereference a **void ***.
- We can use **memcpy** or **memmove** to copy data from one memory location to another.
- To do pointer arithmetic with a **void ***, we must first cast it to a **char ***.
- **void *** and generics are powerful but dangerous because of the lack of type checking, so we must be extra careful when working with generic memory.

Recap

- **Overview:** Generics
- Generic Swap
- Generics Pitfalls
- Generic Array Swap
- Generic Array Rotation

Next time: *Function Pointers*